


Farm Duty Motor Line

Features:

- Single Phase
- 1/3-10HP, 2 & 4 Pole
- TEFC Enclosure
- Rolled Steel Construction
- NEMA Design
- 115/230V up to 2HP, 230V 2HP and Larger
- 1.15 Service Factor
- High Torque
- Class F Insulation
- Continuous Duty Cycle
- Capacitor Run 1/3-3/4HP
- Capacitor Start / Induction Run 1HP and Larger
- 40°C Ambient
- With or without Overload Protection with Manual Reset
- NEMA Frame 56-215T
- Flange Mount with Feet Available

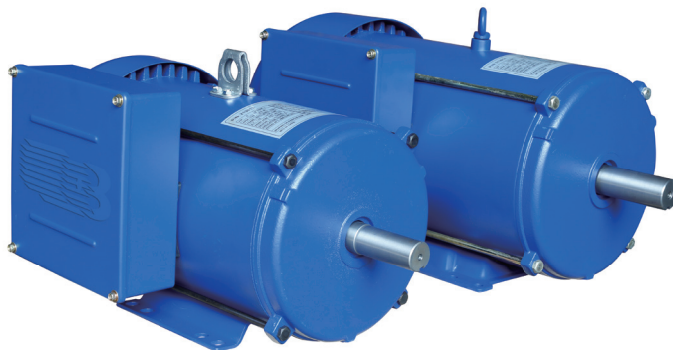

No	Cat.No.	Models	HP	Pole	Voltage	Frame
1	BME-L221	BTND145T-36-2	2	2	230	145T
2	BME-L222	BTND182T-36-3	3	2	230	182T
3	BME-L223	BTND184T-36-5	5	2	230	184T
4	BME-L224	BTND213T-36-7.5	7.5	2	230	213T
5	BME-L225	BTND215T-36-10	10	2	230	215T
6	BME-L201	BTND56-18-1/3	1/3	4	115/230	56
7	BME-L202	BTND56-18-1/2	1/2	4	115/230	56
8	BME-L203	BTND56-18-3/4	3/4	4	115/230	56
9	BME-L204	BTND56-18-1	1	4	115/230	56
10	BME-L205	BTND143T-18-1	1	4	115/230	143T
11	BME-L206	BTND56H-18-1.5	1-1/2	4	115/230	56H
12	BME-L207	BTND145T-18-1.5	1-1/2	4	115/230	145T
13	BME-L208	BTND56H-18-2	2	4	115/230	56H
14	BME-L209	BTND145T-18-2	2	4	115/230	145T
15	BME-L210	BTND182T-18-2	2	4	230	182T
16	BME-L211	BTND182T-18-3	3	4	230	182T
17	BME-L212	BTND184T-18-5	5	4	230	184T
18	BME-L214	BTND213T-18-7.5	7.5	4	230	213T
19	BME-L214	BTND215TZ-18-7.5	7.5	4	230	215TZ
20	BME-L215	BTND215T-18-10	10	4	230	215T